

C5-HDP2 CAT5 Distribution Component HD Video

KEY FEATURES

1080P



UTP Balun Transformer
Distribute a high definition video/digital audio source to a remote location over extended distances using economical CAT5 cable.

- Uses standard CAT5 or CAT6 cable
- Can be used with four composite video signals
- Integrated 8" RCA component video cable
- Includes 8", 3.5mm to RCA audio cable
- Heavy gauge aluminum, powder-coated chassis, corrosion and scratch resistant

Specifications

Video:

Nominal input level:	1 Volt peak to peak
Gain:	N/A (passive unit)
Input Impedance:	75 ohms, unbalanced
Output Impedance:	100 ohms, balanced
Isolation port to port:	60 dB
Isolation output to input:	bidirectional
Return loss:	>15 dB
Video bandwidth:	>35 MHz

Audio:

1 Audio Channel Available: may be used to transport a SPDIF digital audio signal or a mono audio signal (mono analog signal will be attenuated slightly due to lower impedance of the digital audio channel)

Distance:

The adapter provides a minimum signal loss and may be used for high definition distribution with cable lengths up to 200 feet with no monitor adjustment

Power:

No power required



Dimensions:

1.5" x 1.7" x 3.9"

Weight:

0.5 lbs

UTP EXTENDERS

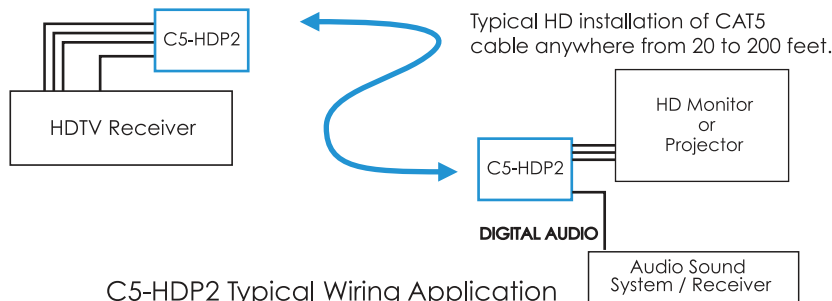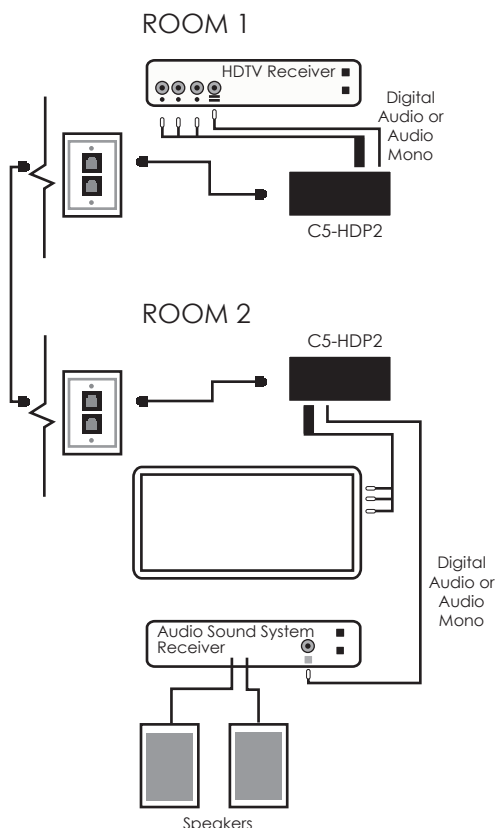

AUTHORIZED RESELLER:

CONTACT:

